
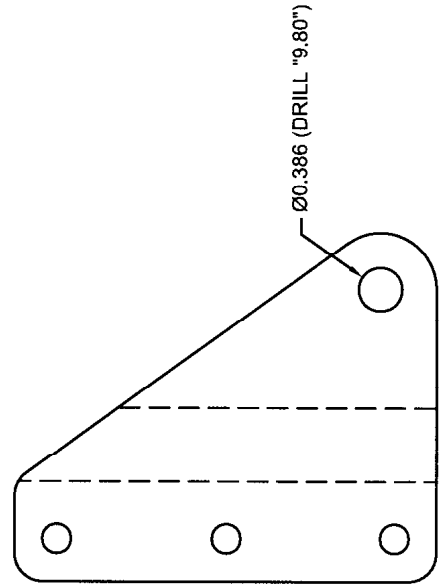
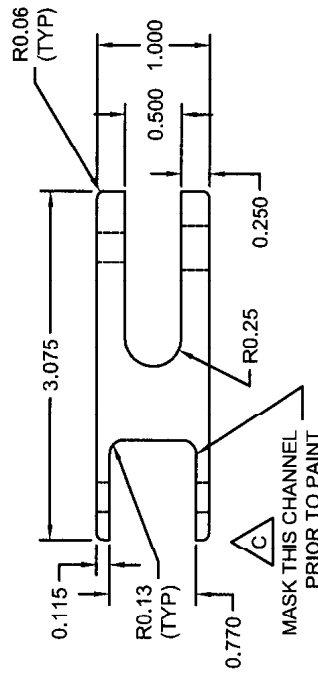


07.08.29

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T6510/T6511/T62) BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
(REF. DART SPEC. M6061T6B)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT WHITE (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3052-1" USING FINE
POINT PERMANENT INK MARKER
- 7) WEIGHT: 0.44 lbs

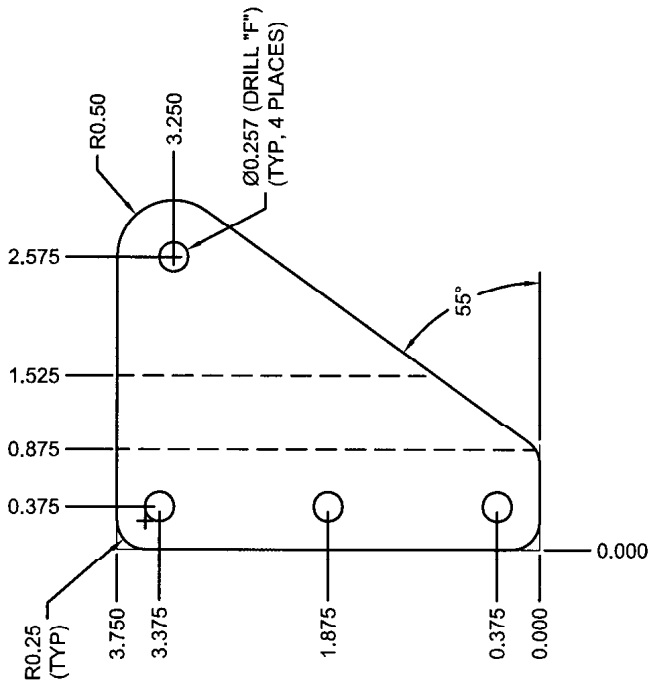

B	- ADDED MASKING DETAIL - DUE TO TIGHT FIT WHEN INSTALLED ON BASKET - ADD MASKING STEP TO ESTIMATE		DC	07.07.25
A	NEW ISSUE		RF	01.11.01
REV.	DESCRIPTION		BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. REV. B D3052 SHEET 1 OF 1 TITLE SCALE MOUNTING LUG 1:2		
DRAWN	DC			
CHECKED				
MFG. APPR.				
APPROVED				
DE APPR.		COPYRIGHT © 2001 BY DART AEROSPACE LTD		
DATE	07.07.25	THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		